



Luszczek
High quality made in Poland



SILENCER CATALOG

NOVEMBER 2025





HUSH-TAC
BY ŁUSZCZEK

Our many years of experience combined with the ability to learn about customer needs and the new technology we have, led us to create new innovations, such as the phenomenal Hush - tac by Łuszczek.

In our factory, we produce silencers for sniper weapons so that our customers have the opportunity to enjoy shooting.

Our professionals have made every effort to create a silencer made of solid materials using the latest high-precision digital machine tools and pride themselves on precise workmanship. As for the Hush-tac components, the basis is a special aluminum alloy that provides high strength, even with long bursts of quick shots. Hush-tac silencers by Łuszczek are characterized by a well-thought-out, functional design. An additional advantage is the attenuation, which is at the level of 36dB and is distinguished by reduced recoil. Thanks to its construction, our new Hush-tac product does not require excessive cleaning and, what is important, is resistant to harsh weather conditions. The entire design, development and testing process takes place in our factory.

 **Łuszczek**

High quality made in Poland

Łuszczek is a leading technology company developing in three departments: shooting, hunting and carrying out orders for the army. Our company develops, produces and sells to its customers highly innovative solutions, shaping the world of assemblies and accessories. The basis for success is high expenditure on research and development, thanks to which we ensure high quality of our solutions, at the same time enjoying great interest among customers







HUSH-TAC

BY ŁUSZCZEK




STANDARD

HUNTING FIREARM MODEL

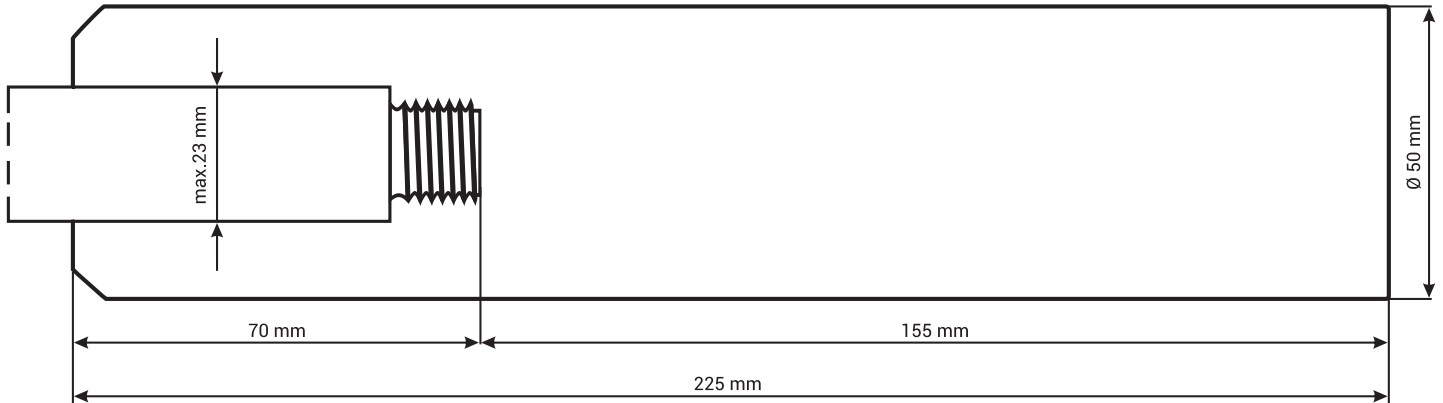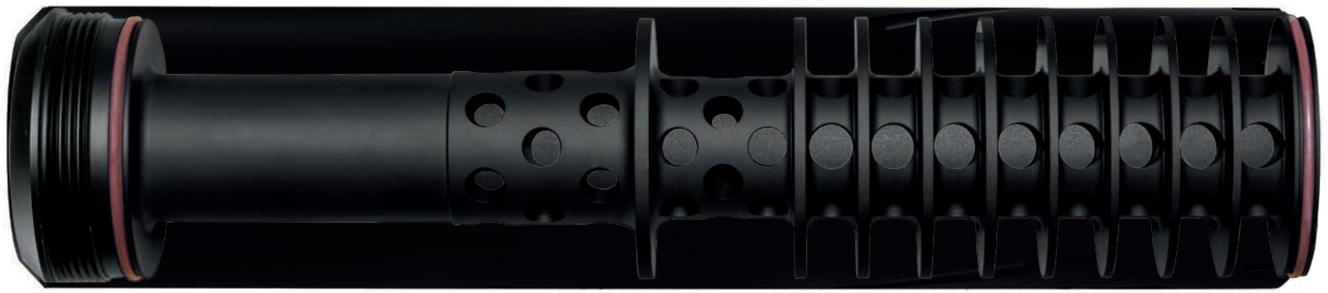

TOTAL LENGTH - 225 mm



DIAMETER Ø - 50 mm




WEIGHT - 415 g



ADDED LENGTH - 155 mm



SUPPRESSION - 36 dB



MAXIMUM BARREL THICKNESS- 23mm

Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number
5,6mm	Without bushing	56-ST	6,5mm	Without bushing	65-ST	8mm	Without bushing	80-ST	9,3mm	Without bushing	93-ST
	M 13x1 Lock	56-131LK-ST		M 13x1 Lock	65-131LK-ST		M 13x1 Lock	80-131LK-ST		M 13x1 Lock	93-131LK-ST
	M 14x1 Lock	56-141LK-ST		M 14x1 Lock	65-141LK-ST		M 14x1 Lock	80-141LK-ST		M 14x1 Lock	93-141LK-ST
	M 15x1 Lock	56-151LK-ST		M 15x1 Lock	65-151LK-ST		M 15x1 Lock	80-151LK-ST		M 15x1 Lock	93-151LK-ST
	M 16x1 Lock	56-161LK-ST		M 16x1 Lock	65-161LK-ST		M 16x1 Lock	80-161LK-ST		M 16x1 Lock	93-161LK-ST
	M 17x1 Lock	56-171LK-ST		M 17x1 Lock	65-171LK-ST		M 17x1 Lock	80-171LK-ST		M 17x1 Lock	93-171LK-ST
	M 18x1 Lock	56-181LK-ST		M 18x1 Lock	65-181LK-ST		M 18x1 Lock	80-181LK-ST		M 18x1 Lock	93-181LK-ST
	1/2"-20 UNF Lock	56-20ULK-ST		1/2"-20 UNF Lock	65-20ULK-ST		1/2"-20 UNF Lock	80-20ULK-ST		1/2"-20 UNF Lock	93-20ULK-ST
	1/2"-28 UNEF Lock	56-28ULK-ST		1/2"-28 UNEF Lock	65-28ULK-ST		1/2"-28 UNEF Lock	80-28ULK-ST		1/2"-28 UNEF Lock	93-28ULK-ST
	5/8" 24 UNEF Lock	56-UNLK-ST		5/8" 24 UNEF Lock	65-UNLK-ST		5/8" 24 UNEF Lock	80-UNLK-ST		5/8" 24 UNEF Lock	93-UNLK-ST
	M 12x1	56-121-ST		M 12x1	65-121-ST		M 12x1	80-121-ST		M 12x1	93-121-ST
	M 13x1	56-131-ST		M 13x1	65-131-ST		M 13x1	80-131-ST		M 13x1	93-131-ST
	M 14x1	56-141-ST		M 14x1	65-141-ST		M 14x1	80-141-ST		M 14x1	93-141-ST
	M 15x1	56-151-ST		M 15x1	65-151-ST		M 15x1	80-151-ST		M 15x1	93-151-ST
	M 16x1	56-161-ST		M 16x1	65-161-ST		M 16x1	80-161-ST		M 16x1	93-161-ST
	M 17x1	56-171-ST		M 17x1	65-171-ST		M 17x1	80-171-ST		M 17x1	93-171-ST
	M 18x1	56-181-ST		M 18x1	65-181-ST		M 18x1	80-181-ST		M 18x1	93-181-ST
5,6mm	1/2"-20 UNF	56-20U-ST	6,5mm	1/2"-20 UNF	65-20U-ST	8mm	1/2"-20 UNF	80-20U-ST	9,3mm	1/2"-20 UNF	93-20U-ST
	1/2"-28 UNEF	56-28U-ST		1/2"-28 UNEF	65-28U-ST		1/2"-28 UNEF	80-28U-ST		1/2"-28 UNEF	93-28U-ST
	5/8" 24 UNEF	56-UN-ST		5/8" 24 UNEF	65-UN-ST		5/8" 24 UNEF	80-UN-ST		5/8" 24 UNEF	93-UN-ST





HUSH-TAC


BY ŁUSZCZEK



THE PERFECT SILENCER
FOR THERMOVISION

ULTRALIGHT


HUNTING FIREARM MODEL

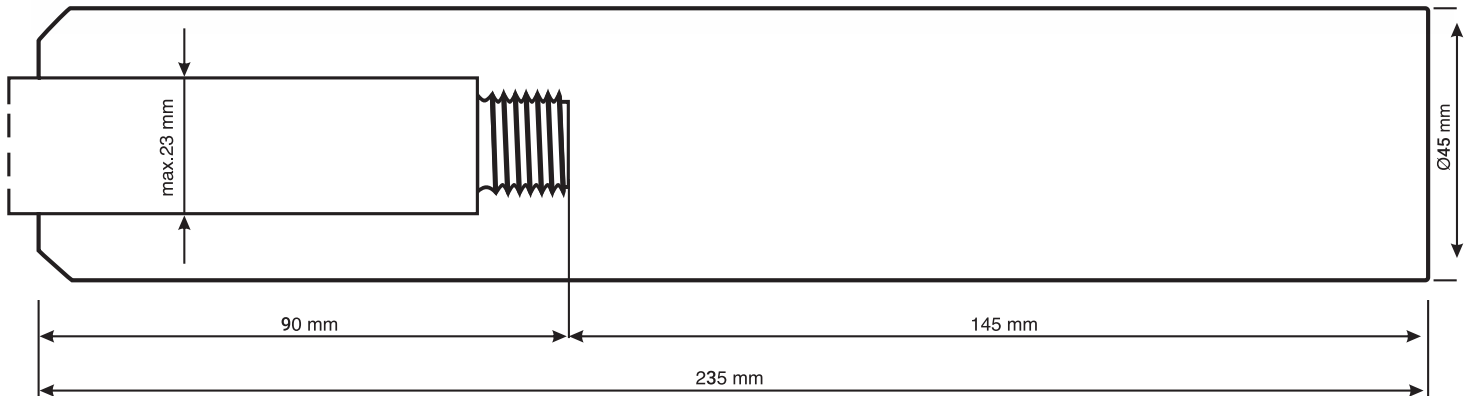

TOTAL LENGTH - 235 mm



ADDED LENGTH - 145 mm




DIAMETER Ø - 45 mm



SUPPRESSION - 35 dB



WEIGHT - 328 g



MAXIMUM BARREL
THICKNESS- 23mm

Comparison of the thermal imaging effect of silencers

Ø45 ULTRALIGHT vs Ø50 STANDARD

Lower emissions
visible in thermal imaging

Increased
heat emission
after shot


Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number
5,6mm	Without bushing	56-UL	6,5mm	Without bushing	65-UT	8mm	Without bushing	80-UL	9,3mm	Without bushing	93-UL
	M 13x1 Lock	56-131LK-UL		M 13x1 Lock	65-131LK-UL		M 13x1 Lock	80-131LK-UL		M 13x1 Lock	93-131LK-UL
	M 14x1 Lock	56-141LK-UL		M 14x1 Lock	65-141LK-UL		M 14x1 Lock	80-141LK-UL		M 14x1 Lock	93-141LK-UL
	M 15x1 Lock	56-151LK-UL		M 15x1 Lock	65-151LK-UL		M 15x1 Lock	80-151LK-UL		M 15x1 Lock	93-151LK-UL
	M 16x1 Lock	56-161LK-UL		M 16x1 Lock	65-161LK-UL		M 16x1 Lock	80-161LK-UL		M 16x1 Lock	93-161LK-UL
	M 17x1 Lock	56-171LK-UL		M 17x1 Lock	65-171LK-UL		M 17x1 Lock	80-171LK-UL		M 17x1 Lock	93-171LK-UL
	M 18x1 Lock	56-181LK-UL		M 18x1 Lock	65-181LK-UL		M 18x1 Lock	80-181LK-UL		M 18x1 Lock	93-181LK-UL
	1/2"-20 UNF Lock	56-20ULK-UL		1/2"-20 UNF Lock	65-20ULK-UL		1/2"-20 UNF Lock	80-20ULK-UL		1/2"-20 UNF Lock	93-20ULK-UL
	1/2"-28 UNEF Lock	56-28ULK-UL		1/2"-28 UNEF Lock	65-28ULK-UL		1/2"-28 UNEF Lock	80-28ULK-UL		1/2"-28 UNEF Lock	93-28ULK-UL
	5/8" 24 UNEF Lock	56-UNLK-UL		5/8" 24 UNEF Lock	65-UNLK-UL		5/8" 24 UNEF Lock	80-UNLK-UL		5/8" 24 UNEF Lock	93-UNLK-UL
	M 12x1	56-121-UL		M 12x1	65-121-UL		M 12x1	80-121-UL		M 12x1	93-121-UL
	M 13x1	56-131-UL		M 13x1	65-131-UL		M 13x1	80-131-UL		M 13x1	93-131-UL
	M 14x1	56-141-UL		M 14x1	65-141-UL		M 14x1	80-141-UL		M 14x1	93-141-UL
	M 15x1	56-151-UL		M 15x1	65-151-UL		M 15x1	80-151-UL		M 15x1	93-151-UL
	M 16x1	56-161-UL		M 16x1	65-161-UL		M 16x1	80-161-UL		M 16x1	93-161-UL
	M 17x1	56-171-UL		M 17x1	65-171-UL		M 17x1	80-171-UL		M 17x1	93-171-UL
	M 18x1	56-181-UL		M 18x1	65-181-UL		M 18x1	80-181-UL		M 18x1	93-181-UL
	1/2"-20 UNF	56-20U-UL		1/2"-20 UNF	65-20U-UL		1/2"-20 UNF	80-20U-UL		1/2"-20 UNF	93-20U-UL
	1/2"-28 UNEF	56-28U-UL		1/2"-28 UNEF	65-28U-UL		1/2"-28 UNEF	80-28U-UL		1/2"-28 UNEF	93-28U-UL
	5/8" 24 UNEF	56-UN-UL		5/8" 24 UNEF	65-UN-UL		5/8" 24 UNEF	80-UN-UL		5/8" 24 UNEF	93-UN-UL




HUSH-TAC
BY ŁUSZCZEK



SHORT
HUNTING FIREARM MODEL

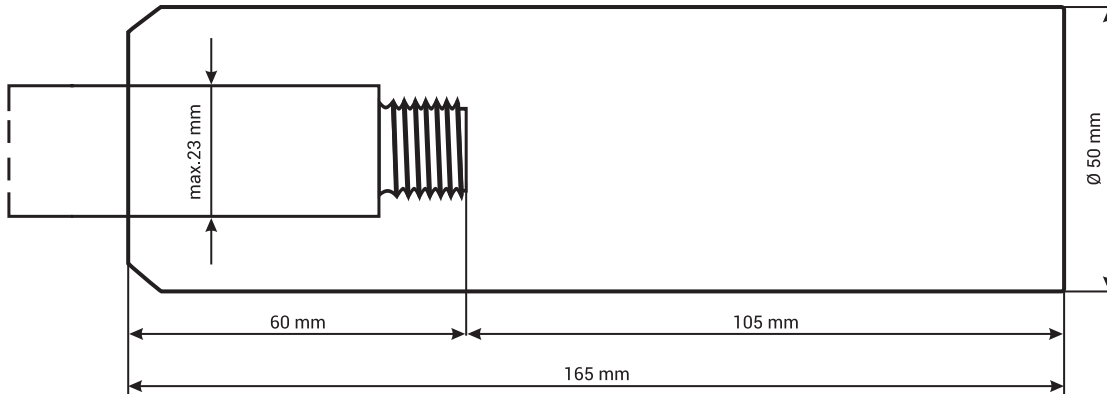

TOTAL LENGTH - 165 mm



DIAMETER Ø - 50 mm



WEIGHT - 325 g



ADDED LENGTH - 105 mm



SUPPRESSION - 32 dB



MAXIMUM BARREL THICKNESS - 23mm

Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number
5,6mm	Without bushing	56-SH	6,5mm	Without bushing	65-SH	8mm	Without bushing	80-SH	9,3mm	Without bushing	93-SH
	M 13x1 Lock	56-131LK-SH		M 13x1 Lock	65-131LK-SH		M 13x1 Lock	80-131LK-SH		M 13x1 Lock	93-131LK-SH
	M 14x1 Lock	56-141LK-SH		M 14x1 Lock	65-141LK-SH		M 14x1 Lock	80-141LK-SH		M 14x1 Lock	93-141LK-SH
	M 15x1 Lock	56-151LK-SH		M 15x1 Lock	65-151LK-SH		M 15x1 Lock	80-151LK-SH		M 15x1 Lock	93-151LK-SH
	M 16x1 Lock	56-161LK-SH		M 16x1 Lock	65-161LK-SH		M 16x1 Lock	80-161LK-SH		M 16x1 Lock	93-161LK-SH
	M 17x1 Lock	56-171LK-SH		M 17x1 Lock	65-171LK-SH		M 17x1 Lock	80-171LK-SH		M 17x1 Lock	93-171LK-SH
	M 18x1 Lock	56-181LK-SH		M 18x1 Lock	65-181LK-SH		M 18x1 Lock	80-181LK-SH		M 18x1 Lock	93-181LK-SH
	1/2"-20 UNF Lock	56-20ULK-SH		1/2"-20 UNF Lock	65-20ULK-SH		1/2"-20 UNF Lock	80-20ULK-SH		1/2"-20 UNF Lock	93-20ULK-SH
	1/2"-28 UNEF Lock	56-28ULK-SH		1/2"-28 UNEF Lock	65-28ULK-SH		1/2"-28 UNEF Lock	80-28ULK-SH		1/2"-28 UNEF Lock	93-28ULK-SH
	5/8" 24 UNEF Lock	56-UNLK-SH		5/8" 24 UNEF Lock	65-UNLK-SH		5/8" 24 UNEF Lock	80-UNLK-SH		5/8" 24 UNEF Lock	93-UNLK-SH
	M 12x1	56-121-SH		M 12x1	65-121-SH		M 12x1	80-121-SH		M 12x1	93-121-SH
	M 13x1	56-131-SH		M 13x1	65-131-SH		M 13x1	80-131-SH		M 13x1	93-131-SH
	M 14x1	56-141-SH		M 14x1	65-141-SH		M 14x1	80-141-SH		M 14x1	93-141-SH
	M 15x1	56-151-SH		M 15x1	65-151-SH		M 15x1	80-151-SH		M 15x1	93-151-SH
	M 16x1	56-161-SH		M 16x1	65-161-SH		M 16x1	80-161-SH		M 16x1	93-161-SH
	M 17x1	56-171-SH		M 17x1	65-171-SH		M 17x1	80-171-SH		M 17x1	93-171-SH
	M 18x1	56-181-SH		M 18x1	65-181-SH		M 18x1	80-181-SH		M 18x1	93-181-SH
	1/2"-20 UNF	56-20U-SH		1/2"-20 UNF	65-20U-SH		1/2"-20 UNF	80-20U-SH		1/2"-20 UNF	93-20U-SH
	1/2"-28 UNEF	56-28U-SH		1/2"-28 UNEF	65-28U-SH		1/2"-28 UNEF	80-28U-SH		1/2"-28 UNEF	93-28U-SH
	5/8" 24 UNEF	56-UN-SH		5/8" 24 UNEF	65-UN-SH		5/8" 24 UNEF	80-UN-SH		5/8" 24 UNEF	93-UN-SH



HUSH-TAC


BY ŁUSZCZEK



NEW REINFORCED CONSTRUCTION!

AR/AK G50

SEMI-AUTO FIREARM MODEL

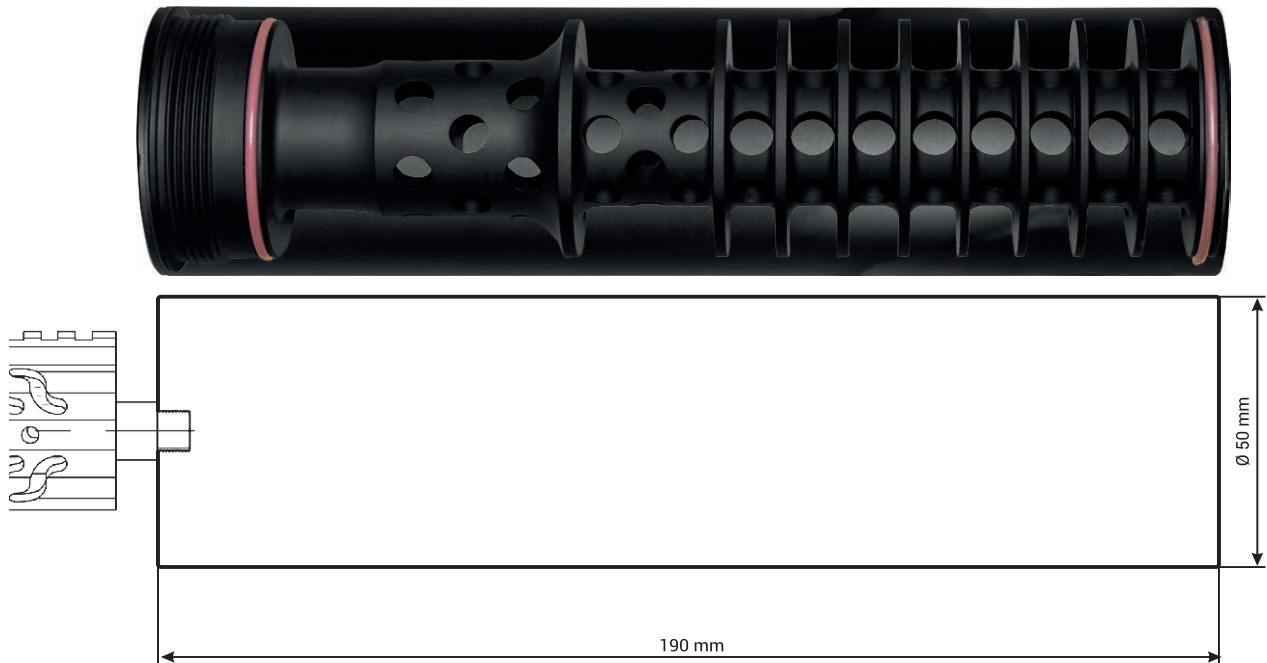

TOTAL LENGTH - 190 mm



DIAMETER Ø - 50 mm



WEIGHT - 430 g



ADDED LENGTH - 190 mm



SUPPRESSION - 35 dB

Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number
5,6mm	Without bushing	56-G50	8mm	Without bushing	80-G50	45 GOV	Without bushing	45-G50
	M 12x1	56-121-G50		M 12x1	80-121-G50		M 12x1	45-121-G50
	M 13x1	56-131-G50		M 13x1	80-131-G50		M 13x1	45-131-G50
	M 14x1	56-141-G50		M 14x1	80-141-G50		M 14x1	45-141-G50
	M 14x1 LH	56-141L-G50		M 14x1 LH	80-141L-G50		M 14x1 LH	45-141L-G50
	M 15x1	56-151-G50		M 15x1	80-151-G50		M 15x1	45-151-G50
	M 16x1	56-161-G50		M 16x1	80-161-G50		M 16x1	45-161-G50
	M 17x1	56-171-G50		M 17x1	80-171-G50		M 17x1	45-171-G50
	M 18x1	56-181-G50		M 18x1	80-181-G50		M 18x1	45-181-G50
	M 24x1,5	56-2415-G50		M 24x1,5	80-2415-G50		M 24x1,5	45-2415-G50
	1/2"-20 UNF	56-20U-G50		1/2"-20 UNF	80-20U-G50		1/2"-20 UNF	45-20U-G50
	1/2"-28 UNEF	56-28U-G50		1/2"-28 UNEF	80-28U-G50		1/2"-28 UNEF	45-28U-G50
	1/2"x36 UNS	56-36U-G50		1/2"x36 UNS	80-36U-G50		1/2"x36 UNS	45-36U-G50
	5/8" 24 UNEF	56-UN-G50		5/8" 24 UNEF	80-UN-G50		5/8" 24 UNEF	45-UN-G50






NEW REINFORCED CONSTRUCTION!

AR/AK G40


SEMI-AUTO FIREARM MODEL

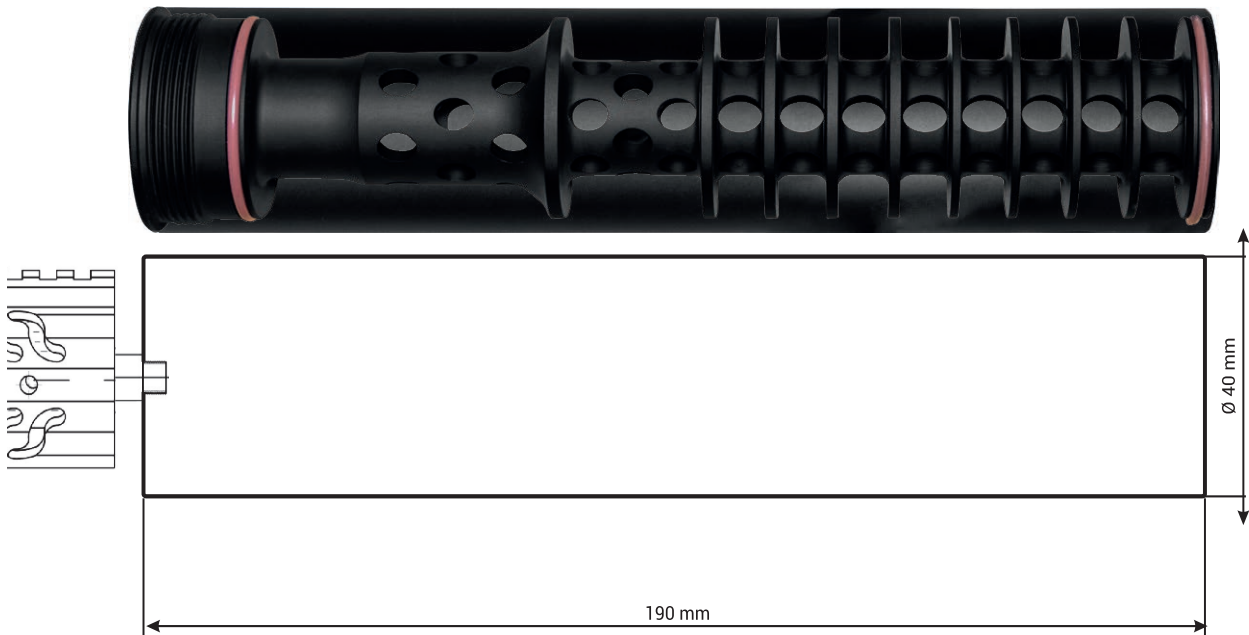

TOTAL LENGTH - 190 mm



ADDED LENGTH - 190 mm



DIAMETER Ø - 40 mm



SUPPRESSION - 33 dB



WEIGHT - 340 g

Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number	Max caliber	Thread	Catalog number
5,6mm	Without bushing	56-G40	8mm	Without bushing	80-G40	9mm	Without bushing	90-G40	45 GOV	Without bushing	45-G40
	M 12x1	56-121-G40		M 12x1	80-121-G40		M 12x1	90-121-G40		M 12x1	45-121-G40
	M 13x1	56-131-G40		M 13x1	80-131-G40		M 13x1	90-131-G40		M 13x1	45-131-G40
	M 14x1	56-141-G40		M 14x1	80-141-G40		M 14x1	90-141-G40		M 14x1	45-141-G40
	M 14x1 LH	56-141L-G40		M 14x1 LH	80-141L-G40		M 14x1 LH	90-141L-G40		M 14x1 LH	45-141L-G40
	M 15x1	56-151-G40		M 15x1	80-151-G40		M 15x1	90-151-G40		M 15x1	45-151-G40
	M 16x1	56-161-G40		M 16x1	80-161-G40		M 16x1	90-161-G40		M 16x1	45-161-G40
	M 17x1	56-171-G40		M 17x1	80-171-G40		M 17x1	90-171-G40		M 17x1	45-171-G40
	M 18x1	56-181-G40		M 18x1	80-181-G40		M 18x1	90-181-G40		M 18x1	45-181-G40
	M 24x1,5	56-2415-G40		M 24x1,5	80-2415-G40		M 18x1 (CZ SCORPION)	90-181-G40 SC		M 24x1,5	45-2415-G40
	1/2"-20 UNF	56-20U-G40		1/2"-20 UNF	80-20U-G40		M 24x1,5	90-2415-G40		1/2"-20 UNF	45-20U-G40
	1/2"-28 UNEF	56-28U-G40		1/2"-28 UNEF	80-28U-G40		1/2"-20 UNF	90-20U-G40		1/2"-28 UNEF	45-28U-G40
	1/2"x36 UNS	56-36U-G40		1/2"x36 UNS	80-36U-G40		1/2"-28 UNEF	90-28U-G40		1/2"x36 UNS	45-36U-G40
	5/8" 24 UNEF	56-UN-G40		5/8" 24 UNEF	80-UN-G40		1/2"x36 UNS	90-36U-G40		5/8" 24 UNEF	45-UN-G40
							5/8" 24 UNEF	90-UN-G40			



HUSH-TAC

BY ŁUSZCZEK




PISTOL



TOTAL LENGTH - 190 mm



ADDED LENGTH - 190 mm



DIAMETER Ø - 35 mm



SUPPRESSION - 34 dB



WEIGHT - 250 g



Max caliber	Thread	Catalog number
9 mm	M 13,5x1LH	9-135L-P
	1/2"-28 UNEF	9-28U-P




PISTOL S NEW



TOTAL LENGTH - 155 mm



ADDED LENGTH - 155 mm




DIAMETER Ø - 35 mm



SUPPRESSION - 30 dB



WEIGHT - 205 g

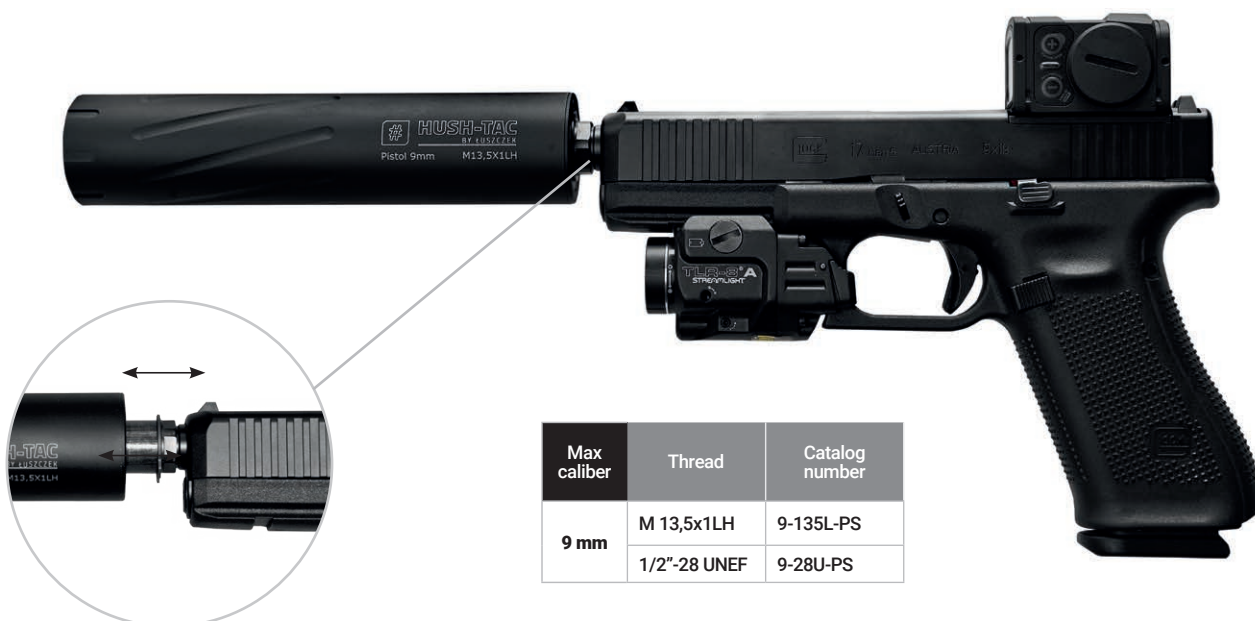

Max caliber	Thread	Catalog number
9 mm	M 13,5x1LH	9-135L-PS
	1/2"-28 UNEF	9-28U-PS



HUSH-TAC
BY ŁUSZCZEK




SYSTEM LOCK



NEW

MUZZLE BRAKE LOCK


	Thread	Catalog number
MUZZLE BRAKE LOCK	5,6 - 9,3 mm	MB-LK

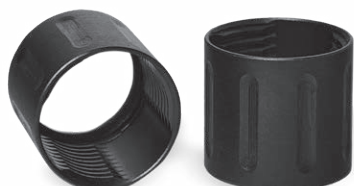

NEW

THREAD PROTECTION LOCK

	Diameter	Catalog number
THREAD PROTECTION LOCK	ø 20 mm	TP - LK

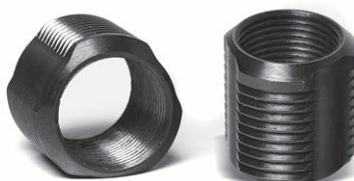

NEW

MUZZLE ADAPTER LOCK

Thread	Catalog number
M 13x1 Lock	MA - 131LK
M 14x1 Lock	MA - 141LK
M 15x1 Lock	MA - 151LK
1/2"-20 UNF Lock	MA - 20ULK
1/2"-28 UNF Lock	MA - 28ULK



NEW

LONG MUZZLE ADAPTER LOCK

Thread	Catalog number
M 16x1 Lock	MA - 161LKL
M 17x1 Lock	MA - 171LKL
M 18x1 Lock	MA - 181LKL
5/8-24 UNEF Lock	MA - UNLK



NEOPREN COVER

NEW

Silencer model	length (mm)	Catalog number
Standard	220	PN-ST
Short	160	PN-SH
Ultralight	235	PN-UL



Thread	Catalog number
M 13x1	TT-131
M 14x1	TT-141
M 14x1 LH	TT-141LH
M 15x1	TT-151
M 16x1	TT-161
M 17x1	TT-171
M 18x1	TT-181
M 18x1 (CZ SCORPION)	TT-181SC
M 24x1,5	TT-2415
1/2"-20 UNF	TT-20U
1/2"-28 UNEF	TT-28U
1/2"-28 UNEF (DERYA ZK9)	TT-28U-ZK9
1/2"x36 UNS	TT-36U
5/8" 24 UNEF	TT-24UN

THREADED BUSHING



THREADED BUSHING LOCK



	Catalog number
Threaded bushing lock	WT-LK

KEY LOCK

	Catalog number
Key lock	KL1



KEY FOR THREADED BUSHING LOCK

	Catalog number
Key for threaded bushing lock	KL2



Diameter	Catalog number
Ø35	K-35
Ø40	K-40
Ø50/Ø45	K-50/ K-45

KEY FOR SILENCER



ORING



Diameter	Catalog number
Ø35	OR-35
Ø40	OR-40
Ø50	OR-50



Luszczyk

High quality made in Poland

97-213 Smardzewice, ul. Główna 141
POLAND

tel: +48 44 710 86 19

fax: +48 44 734 60 26

e-mail: michal@luszczyk.pl

www.hush-tac.pl

